

Questions contact – Mike Miller (617)-279-1098

Petition of the COMCAST OF MASSACHUSETTS II, INC.
For Cable conduit Location: King St., Northampton, MA

To the City Council of Northampton Massachusetts

Respectfully represents the COMCAST OF MASSACHUSETTS II, INC of Westfield, Massachusetts, that it desires to construct a line of underground cable conduits, including the necessary sustaining and protecting fixtures, under and across the public way or ways hereinafter named.

Wherefore it prays that after due notice and hearing as provided by law, it be granted permission to excavate along public highways and to run and maintain underground cable conduits, together with such sustaining and protecting fixtures as it may find necessary for the transmission of cable, said underground conduits to be located substantially in accordance with the plan filed herewith marked – King St, Northampton Massachusetts

The following are the streets and highways referred to:

King St - Comcast to bore/trench in concrete sidewalk on NE side of roadway approx. 200' and install one 3"-4" PVC conduit. Scope of work to start next to driveway of #71 King St from existing structure to another existing structure in front of #65 King St. Intercept existing conduit that is already under King St on NE side of sidewalk in front of #60/#62 King St. Continue on in private property to side of building with PVC conduit. Restore concrete sidewalks to City and Comcast standards. Final scope of work pending City of Northampton approval and dig safe mark outs. Contractor to secure police detail, parking bags and will be working in sections at a time to limit any disruption of foot and drive up traffic to businesses in area.

Location approximately as shown on plan attached

COMCAST OF MASSACHUSETTS II, INC.

BY Michael Miller
Michael Miller
Construction Department

Dated: September 14th, 2020

ORDERED:

Notice having been given and public hearing held, as provided by law, that the COMCAST OF MASSACHUSETTS II, INC. be and it is hereby granted permission to excavate along public highways and to run and maintain underground cable conduits, together with such sustaining and protecting fixtures as said company may deem necessary, in the public way or ways hereinafter referred to, and to make the necessary business connections along said extensions, as requested in petition with said company dated the 31st day of 2020.

Said underground electric conduits shall be located substantially in accordance with the plan filed herewith marked – King St, Northampton, Massachusetts

The following are the public ways or part of ways along which the underground Communication conduits above referred to may be laid:

King St - Comcast to bore/trench in concrete sidewalk on NE side of roadway approx. 200' and install one 3"-4" PVC conduit. Scope of work to start next to driveway of #71 King St from existing structure to another existing structure in front of #65 King St. Intercept existing conduit that is already under King St on NE side of sidewalk in front of #60/#62 King St. Continue on in private property to side of building with PVC conduit. Restore concrete sidewalks to City and Comcast standards. Final scope of work pending City of Northampton approval and dig safe mark outs. Contractor to secure police detail, parking bags and will be working in sections at a time to limit any disruption of foot and drive up traffic to businesses in area.

I hereby certify that the foregoing order was adopted at a meeting of the
.....
....., held on the day of, 20

..., 20

Received and entered in the records of location orders of the City/Town of
Book Page

Attest:
.....


..... Hereby certify that on20..... at o'clock, .M
at, a public hearing was held on the petition of
COMCAST OF MASSACHUSETTS II, INC. for permission to construct the underground cable
conduits described in the order herewith recorded, and that I mailed at least seven days before said
hearing a written notice of the time and place of said hearing to each of the owners of real estate
(as determined by the last preceding assessment for taxation) along the ways or parts of ways upon

which the Company is permitted to construct the underground Communication conduits under said order. And that thereupon said order was duly adopted.

.....

.....

.....

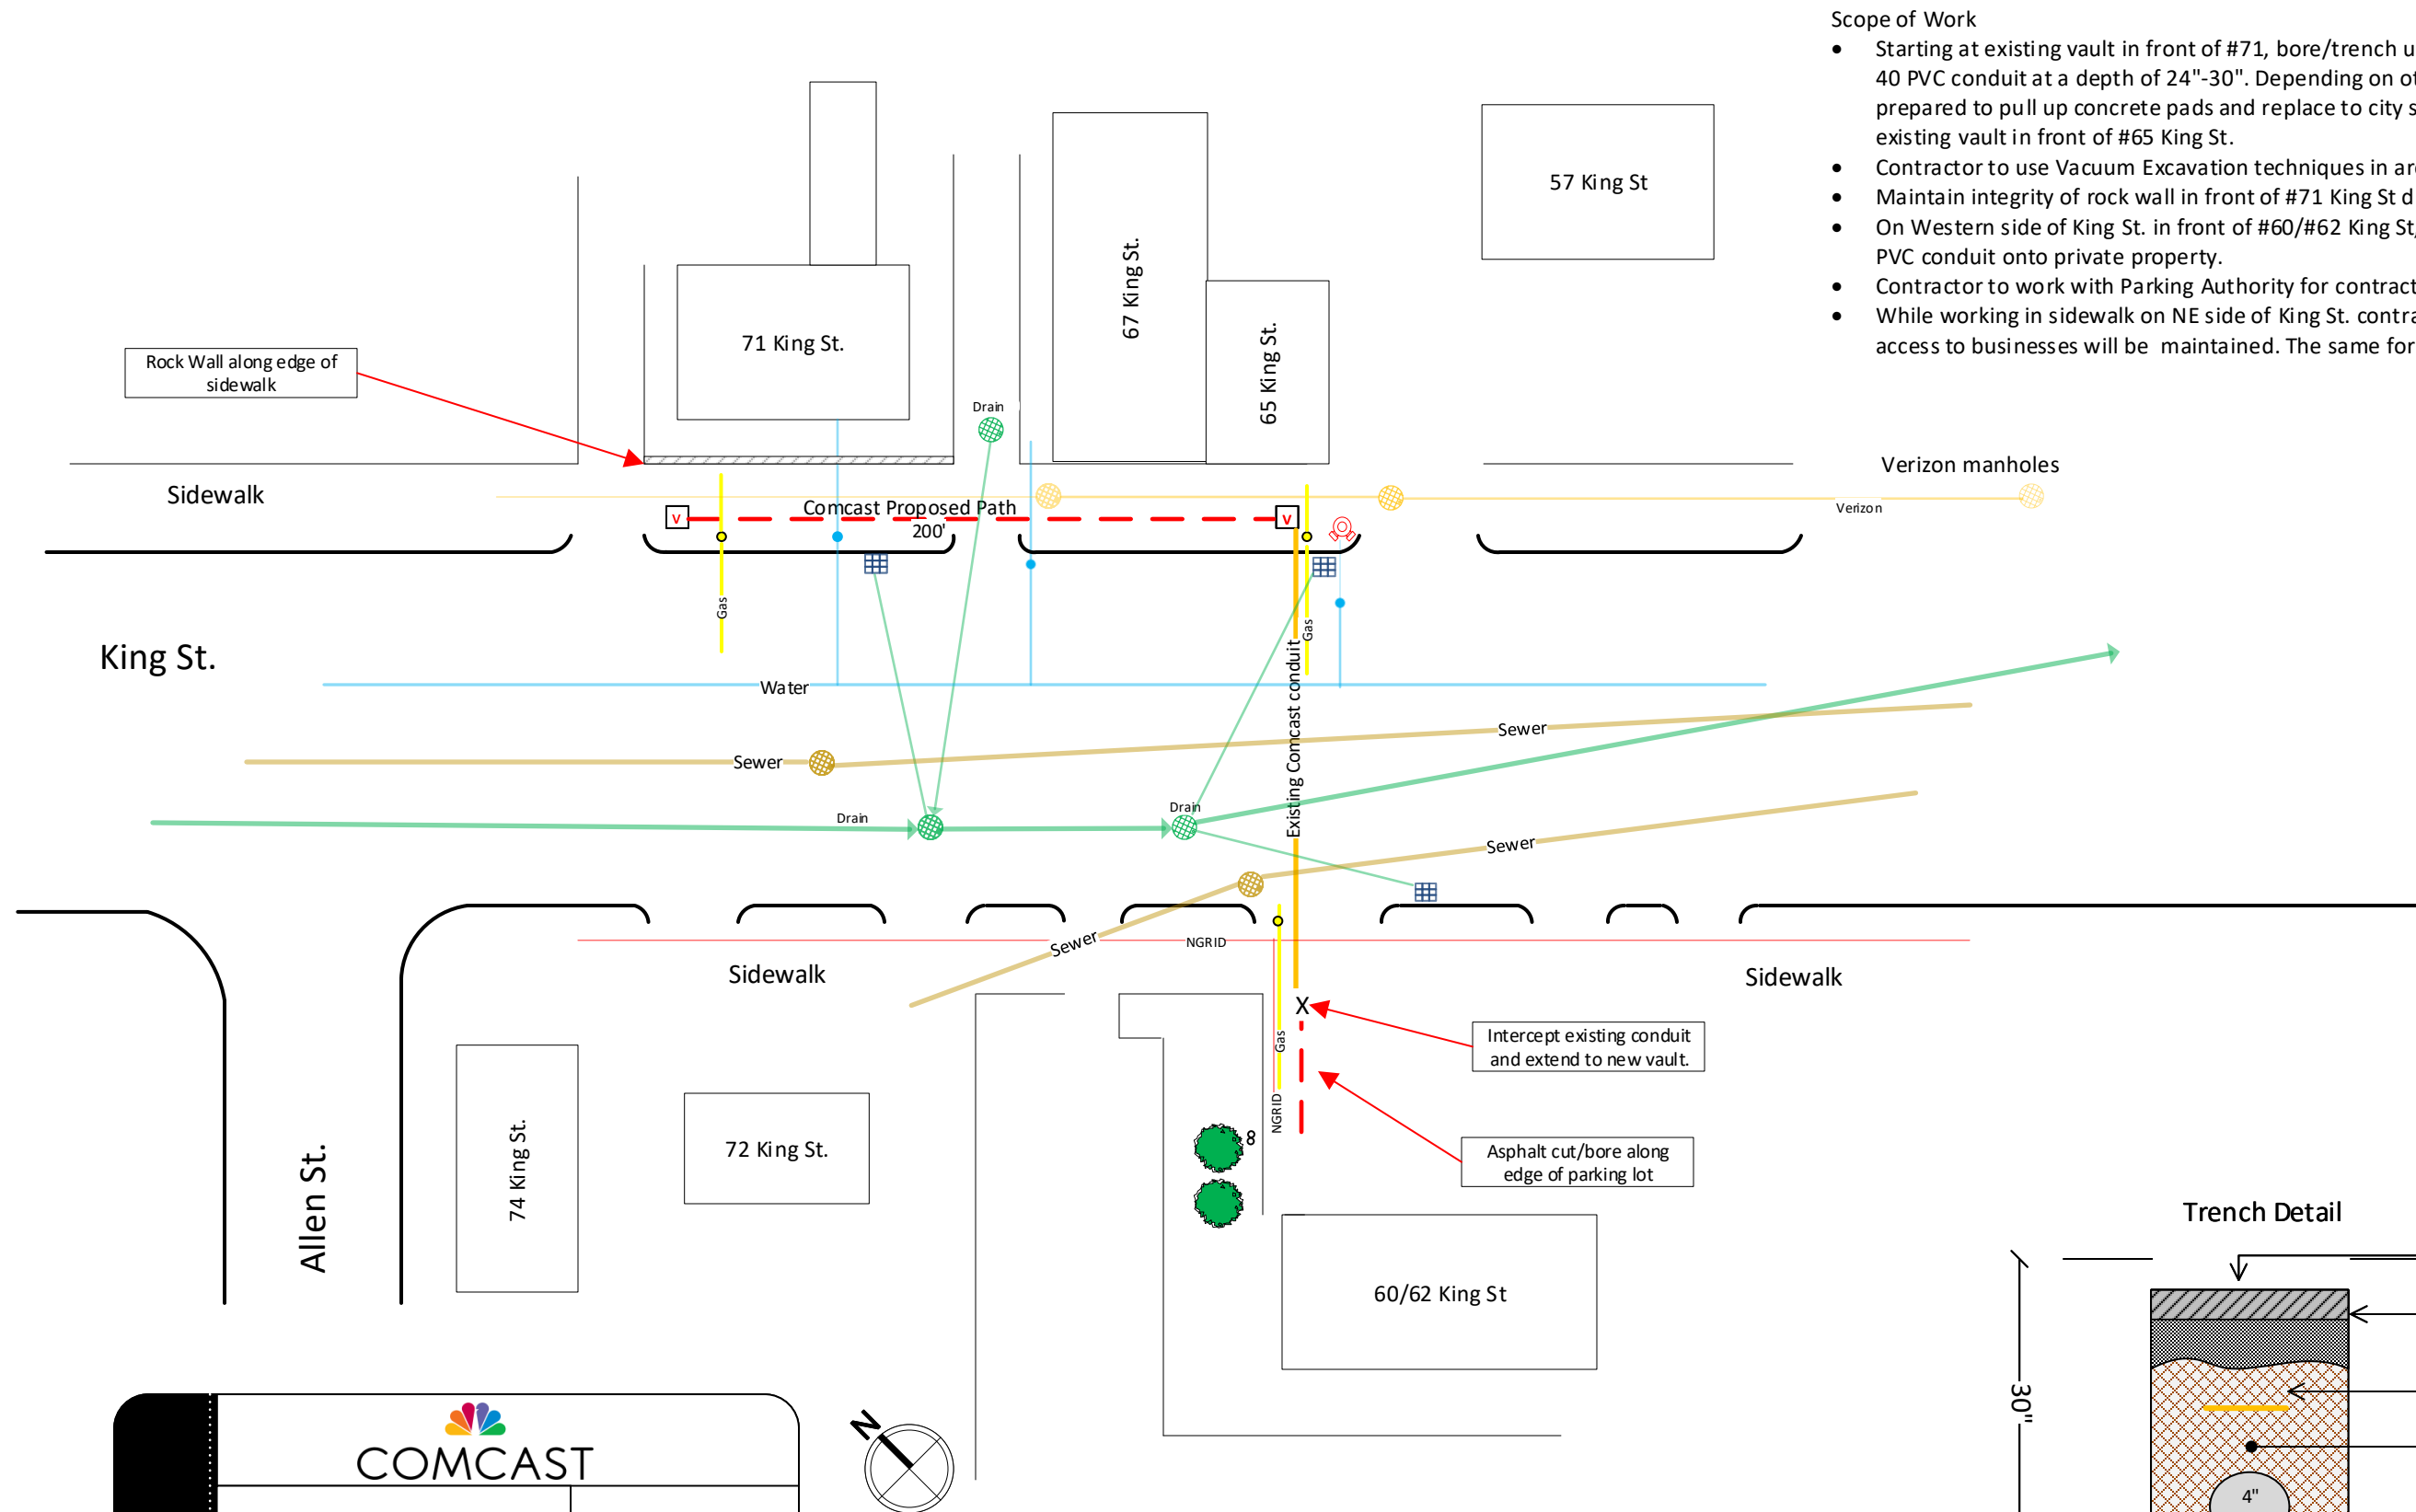

Scope of Work

- Starting at existing vault in front of #71, bore/trench under sidewalk pads installing 3" schedule 40 PVC conduit at a depth of 24"-30". Depending on other utility locations, Comcast is prepared to pull up concrete pads and replace to city standards. Install 3" PVC conduit into 2nd existing vault in front of #65 King St.
- Contractor to use Vacuum Excavation techniques in areas of concentrated utilities.
- Maintain integrity of rock wall in front of #71 King St during construction.
- On Western side of King St. in front of #60/#62 King St, intercept existing conduit and extend 3" PVC conduit onto private property.
- Contractor to work with Parking Authority for contractor vehicles in work zone.
- While working in sidewalk on NE side of King St. contractor will ensure walking and drive up access to businesses will be maintained. The same for work on NW side of King St.

<i>Michael Miller</i>	2/4/2020

